





Motor Type	Displacement cm ³ /rev	Max. Pressure bar	Max. Speed rpm	A ±0,4	B	Inlet/Outlet			Drain
						C	D	E	S
APM10.009.RAB01EGN	0,9	220	4000	34,9	78,1	12	30	M6	G 1/4"
APM10.012.RAB01EGN	1,2			35,5	79,3				
APM10.017.RAB01EGN	1,7			36,5	81,3				
APM10.023.RAB01EGN	2,3			37,5	83,3				
APM10.027.RAB01EGN	2,7			38,5	85,3				
APM10.032.RAB01EGN	3,2			39,3	86,8				
APM10.038.RAB01EGN	3,8			40,5	89,3				
APM10.043.RAB01EGN	4,3			41,5	91,3				
APM10.050.RAB01EGN	5,0			43,0	94,3				
APM10.059.RAB01EGN	5,9			44,8	97,8				
APM10.063.RAB01EGN	6,3	210	3500	45,5	99,3	12	30	M6	G 1/4"
APM10.078.RAB01EGN	7,8			48,5	105,3				
APM10.095.RAB01EGN	9,5			200	52,0				

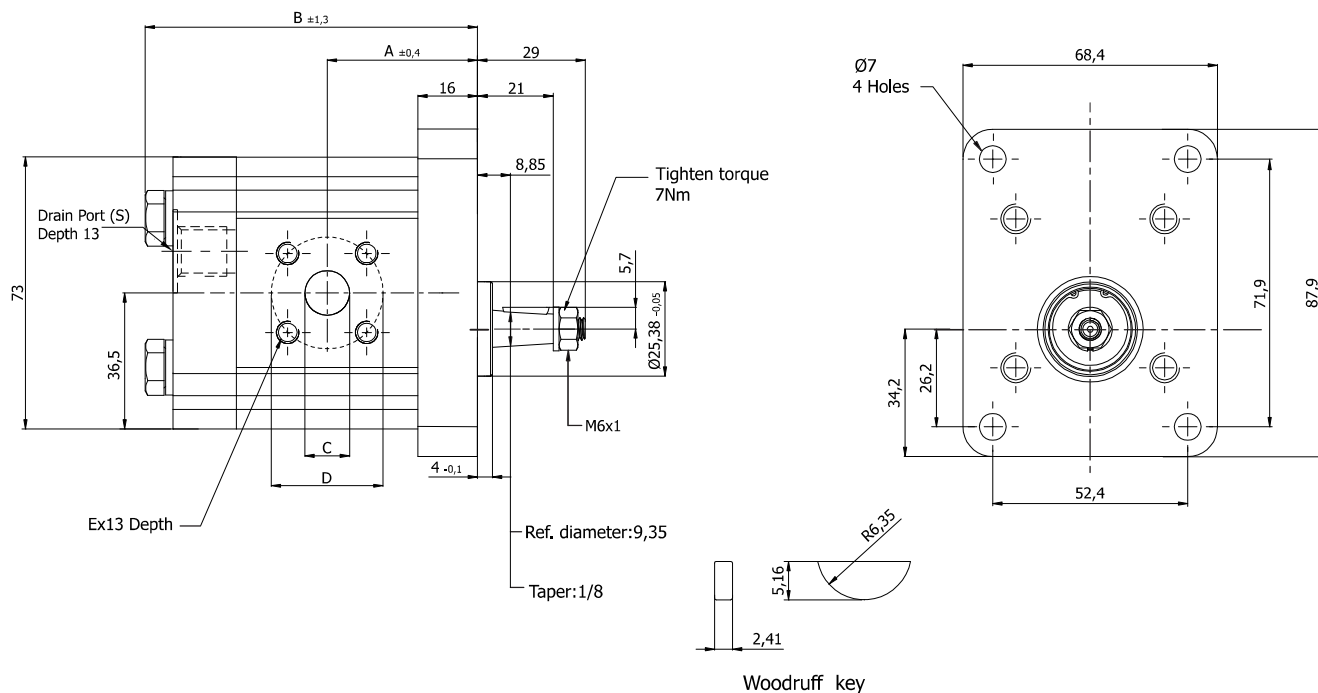

ORDERING CODE OF APM10 MOTOR

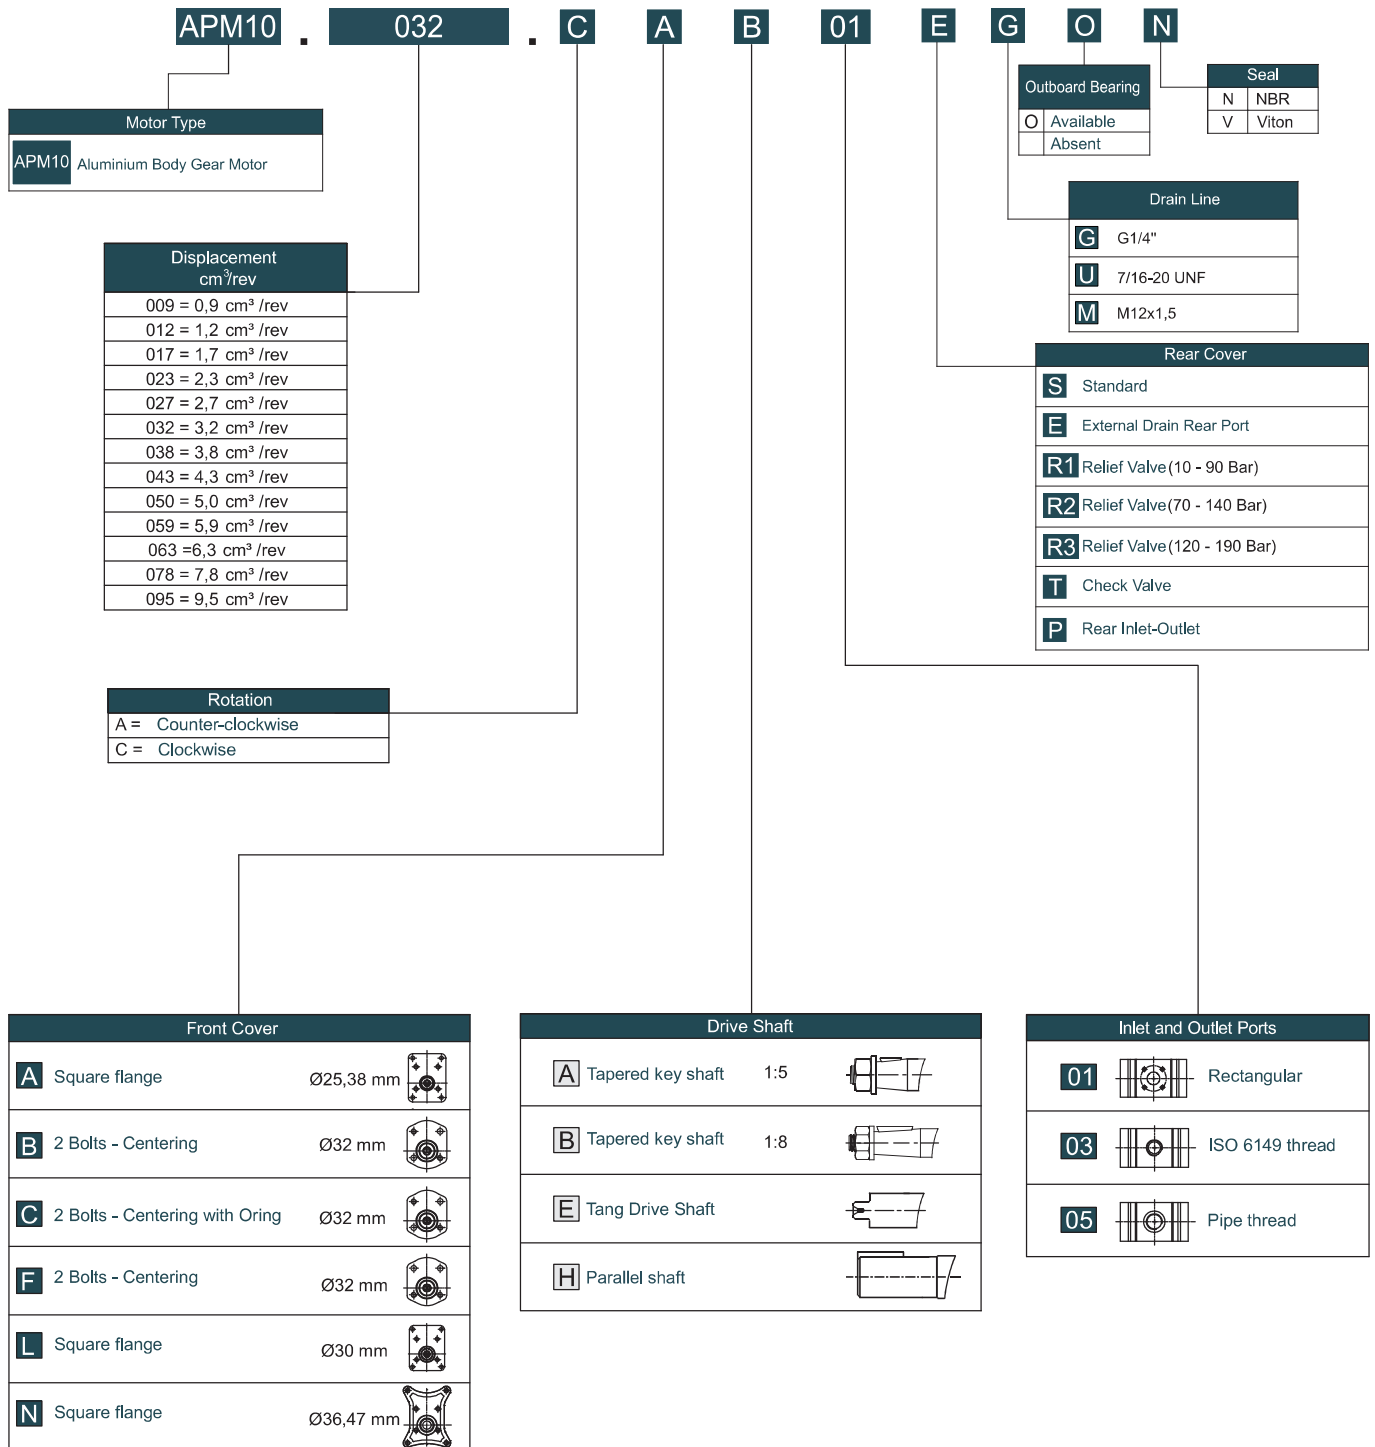

- Code Example (Single) ; APM10.032.RAB01EGN